



Company : SERVOLUX SIA  
To :  
Subject :  
Reference :

Date : 2014.02.11.  
From : A.Grava  
Page : 1 / 3


Model : **HRglobal 3000 TAC4 / NVr / MS / CTm / MS / MS / CTm / MS**

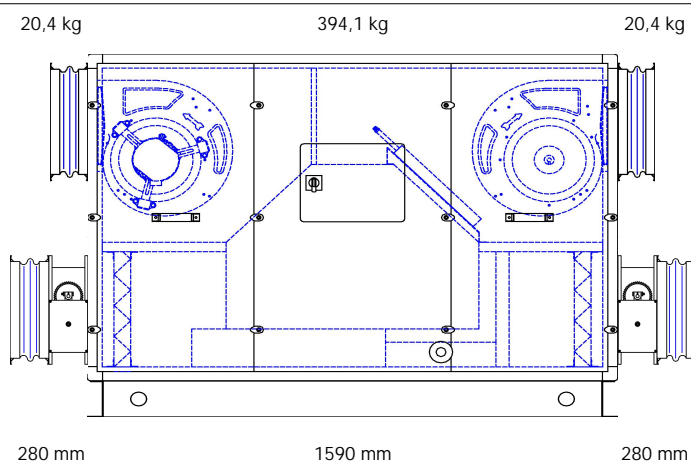

**Outlet exhaust air / Inlet supply air**

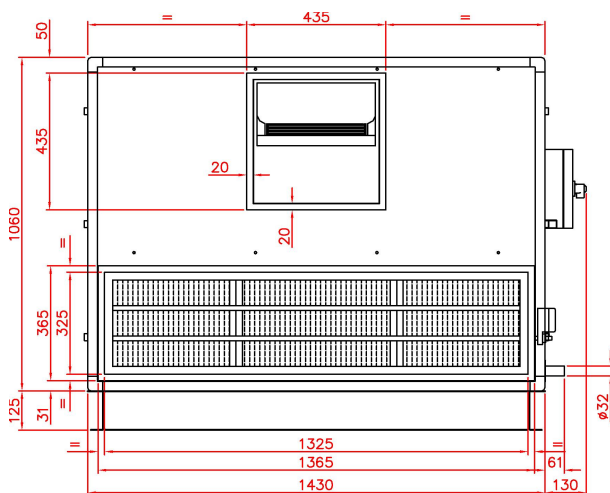

**Outlet supply air / Inlet exhaust air**

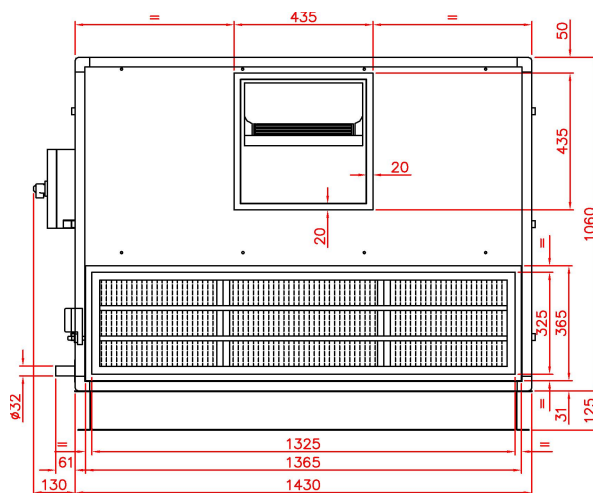

The HRglobal series is a range of mechanical home ventilation units (up to 6000 m<sup>3</sup>/h) with high efficiency (90 % and more) heat recovery, consisting of aluminium counterflow heat exchangers, a stainless steel drain pan, G4 and F7 class filters and of TAC technology centrifugal fans with high efficiency electronic motors. It will be delivered ready to use, entirely pre-cabled (the options as well) and with a remote control which will allow to control the unit without opening it. All that'll need to be done is to connect the power (outside the unit), to connect the remote control and to set the parameters and that's it ! The device will be delivered as standard with a 100% by-pass, and its pre-cabled control. The new control is designed to receive and monitor the different options available according to your needs. The structure of the unit is in extruded anodized aluminium profile, articulated around strengthened polypropylene modules. Panels are 30 mm double skin. The outside is made of polyester pre-painted steel, and the inside is made of galvanized steel. The heat and sound insulation is made of 28mm fireproofed EPS panels, in conformity with the European standards for the environment. The HRglobal series is mounted on base frame, and is made in one piece (mono block). All the access doors to the fans and filters are equipped with handles. Airtightness of the group allows to classify the device in class 1 for the internal leaks and class 2 for the external leaks according to standard EN 13141-7. A unit with the same characteristics can be offered with all airflow connections oriented upwards. The HRup solution can solve many space availability problems, up to 2000 m<sup>3</sup>/h. In case of limited height, we can also offer the HRflat range, up to 2000 m<sup>3</sup>/h as well.

Company :	SERVOLUX SIA	Date :	2014.02.11.
To :		From :	A.Grava
Subject :			
Reference :		Page :	2 / 3

Model :	HRglobal 3000 TAC4 / NVr / MS / CTm / MS / MS / CTm / MS
---------	--

<b>Supply : Fans + Regulation</b>	
Voltage :	1 x 230 V - 50 Hz
Intensity :	17,8 A max.
Electrical protection :	D20A - 10kA - AC3

Fans - TAC

Units are equipped with high efficiency TAC technology fans. They are driven by electronically commutated motors and allow accurate control of the fan's actual working point. The efficiency of the motor remains between 85% and 60%, whatever the working point. The motor is a permanent magnet DC driven motor but AC power supplied.

	<u>Supply</u>	<u>Exhaust</u>		Fan name :	DD 11-11 TAC 1/1 HRg3000								
Airflow :	3000	3000	m³/h	Number of fans :	1 + 1								
Internal pressure drop :	270	280	Pa	Sound power spectrum (fan only)-(dB re.10E-12 W/m²)									
External pressure drop :	271	261	Pa		63	125	250	500	1000	2000	4000	8000	Hz
Extra available pressure drop :	0	0	Pa	S	92,2	87,2	82,2	75,2	77,2	70,2	65,2	60,2	dBL
Rotation speed :	1430	1430	rpm	E	92,2	87,2	82,2	75,2	77,2	70,2	65,2	60,2	dBL
Voltage :	230	230	V	Radiated A weighted Sound pressure level for ducted unit									
Intensity :	6,53	6,53	A	in free field (d=3m)									
Power :	1152	1152	W	49,4 dBA									

(RF=600000000/DF=1/ZF=20,40)-(dB re. 20 µPa)

<b>Regulation</b>	
The units are delivered fully pre-wired as standard ('plug & play') with general switch and complete regulation of the unit. The latter includes all the necessary components and is fully wired to T° probes, fans, general switch, by-pass , as well as all options such as pre and post heating, dampers. Connect the power supply and configure the parameters and the unit is ready to run.	
The regulation monitors each component:	
<ul style="list-style-type: none"> <li>•Setting and piloting of TAC fans in selected mode: CA (constant flow), CP (constant pressure) or LS (link with signal 0 - 10V, for example a CO2 air quality sensor).</li> <li>•Automatic freecooling control with bypass</li> <li>•Antifrost system of the air/air heat exchanger (airflow modulation or electrical coil)</li> <li>•Control of internal post-heating coil (water or electrical)</li> <li>•Control of external post-heating coil (water or electrical) or cooling coil (water), or reversible coil (heating or cooling water coil)</li> <li>•Open/Close motorized dampers</li> <li>•Time slot management (scheduling)</li> <li>•Alarms management (fire, pressure, maintenance, component failure,...)</li> <li>•Display and management of all system parameters via RC, GRC, BMS or web page (option)</li> <li>•MODBUS communication (RTU, TCP/IP and GPRS) (option)</li> </ul>	

Heat Recovery unit - CF

The heat exchanger is an air/air high efficiency counterflow heat exchanger, executed in sea water resistant aluminium, at a temperature of up to 80°C. The airtightness tests according to DIN1946 show a leakage rate of 0.017 % at 400 Pa difference between the 2 air streams. The heat exchanger is compliant to standard EN 308.

Air pressure :1013 mbar

	<u>Supply</u>	<u>Exhaust</u>		<u>Supply</u>	<u>Exhaust</u>	
Airflow :	3000	3000	m³/h	Air outlet temperature :	17,8	-6,1 °C
	0,83	0,83	m³/s	Relative humidity out :	2,3	100,0 %
Airspeed through HRU :	1,85	2,20	m/s	Humidity out :	0,3	2,3 g/kg
Air inlet temperature :	-23,0	22,0	°C	Total capacity (W.B.) :	41,0	kW
Relative humidity in :	60,0	45,0	%	HRU efficiency (W.B.) :	90,7	%
Humidity in :	0,3	7,4	g/kg	Pressure drop in REC :	170	237 Pa

<b>Post-heating (Warm water) - NVr</b>						
It 's a warm water coil of post-heater to allow an accurate control of the supply air temperature. It is delivered ready to be connected to the hot water circuit, with a motorized 3-ways valve and a complete pre-wired regulation. Just key in the assignment temperature, the regulation will modulate the capacity of the heating coil to reach the assignment, according to the resulting temperature after the heat exchanger.						
Coil name :		HRg 3000-1	Air inlet T° :	10,0 °C	Connection diam. :	1/2"
Number of rows :		1	Outlet air T° :	20,0 °C	Fluid type :	Propylen Glycol
Number of circuits :		2	Airflow :	3000 m³/h	Glycol %age :	80,0 / 46,2 %
Total capacity :		10,46 kW	Air speed :	2,16 m/s	Fluid T° in/out :	80,0 / 46,2 °C
			Air pressure drop :	15 Pa	Fluid flow :	283 l/h
					Fluid pressure drop :	2,21 kPa

Company :	SERVOLUX SIA	Date :	2014.02.11.
To :		From :	A.Grava
Subject :			
Reference :		Page :	3 / 3

Model :	<b>HRglobal 3000 TAC4 / NVr / MS / CTm / MS / MS / CTm / MS</b>
---------	---

**Filter - G/F**

The heat recovery ventilation unit is equipped with G4 zig-zag filters at the inlet of the polluted air and filters F7 class filters at inlet of the fresh air, to protect the heat exchanger and guarantee an air quality inside the building. They are easily accessible for maintenance by the access doors equipped with handles.

					<u>Supply</u>	<u>Exhaust</u>	
Filter class :	F7 (Compact)	Dimensions :	436(2x)/503(1x)x370x50 mm	Air speed :	1,72		m/s
		Quantity :	3	Filter pressure drop :	78		Pa
Filter class :	G4 (Plane Z)	Dimensions :	436(2x)/503(1x)x370x50 mm	Air speed :		1,72	m/s
		Quantity :	3	Filter pressure drop :		36	Pa

**Damper(s) - CTm**

It 's a damper delivered motorized and pre-wired, to cut the draft during the powering off of the device. It comes with a pre-wired servo motor and is controlled by the regulation. The frame and the aerofoil blades are in galvanised steel, the bearings are in nylon. The external gears, in plastic material, allow a transmission without looseness or deformation.

					<u>Supply</u>	<u>Exhaust</u>	
External dimensions :	365 x 1365 mm			Air speed :	2,28	2,28	m/s
Internal dimensions :	285 x 1285 mm			Damper pressure drop :	7	7	Pa

**Base frame - BA**
**Flexible connection (air in) - MS**
**Flexible connection (air out) - MS**